



TILE LEVELING SYSTEM

Sope of Application

DUK TRADE spacer clips and wedges are part of a system for levelling ceramic tiles, paving slabs and natural stone slabs. They represent an auxiliary tool used when laying tiles on walls and floors. They make it possible to achieve uniform size of joint widths and absolute alignment of floor and wall coverings of a thickness between 3-12 mm.


They are used for manual laying of floors and wall coverings. The ergonomic shape of the wedges allows easy installation and removal from the spacer clip. The spacer clip are removed simply and easily, without damaging the wedge which can be used multiple times.

Material


Elements of the system are made of polypropylene.

Usage Chart

The table below shows the approximate quantity of spacer clips needed to cover 1m².

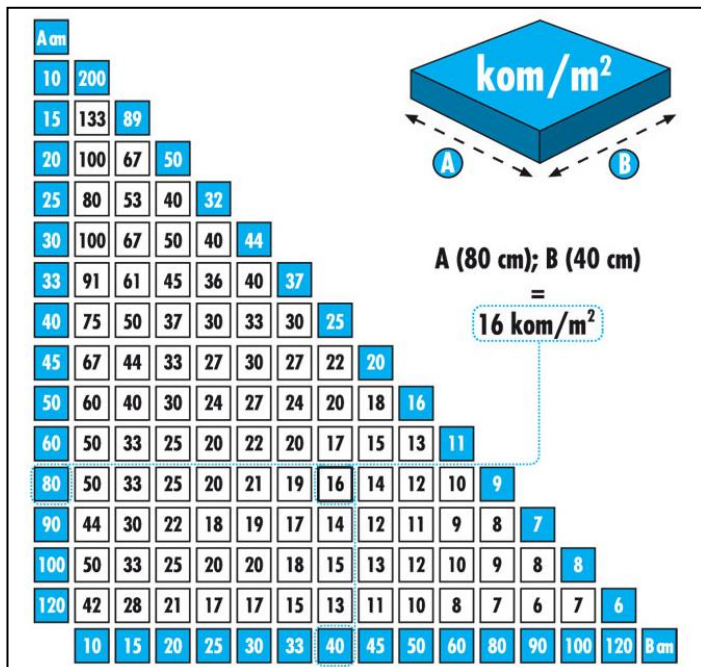

*Consumption may vary depending on the method of installation and flatness of the tiles

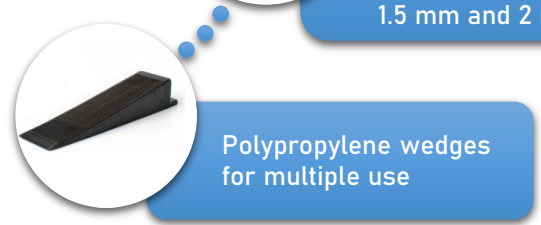

Application Guidelines

It is necessary to ensure that the surface of the tiles is completely clean and that there are no residues of glue or other materials on it.

Apply tile adhesive and place spacer clips under the tile along all four edges of the tile. Depending on the dimensions of the tile, it will be necessary to place one or more spacer clips on each side. After that, place the adjoining tiles to the first tile.

Place the wedge through the spacer clip and press with your fingers until the tile reaches the desired level. Dab excess tile adhesive around the tile to prevent hardened adhesive from scratching or damaging the tile surface when removing the wedge later.

When the tile adhesive is dry, it is necessary to remove the wedges from spacer clips with light blows of a rubber hammer in the direction of the joint. The spacer clips will break and remain under the tile.

The wedges remain undamaged and can be reused.

